






New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times. "Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.







Apeos C3060/C2560/C2060

| Copy/Print | 9 | Scan | Fax*4 | Printing Resolution | Control Panel | |
|-------------------|----------|------------|--------------|----------------------------|---------------|--------------------|
| Colour/Monochrome | Colour/I | Monochrome | | | | •Wireless LAN*4 |
| C3060 30 ppm*1 | 2 sided | *2*3 | | | | Supported |
| C2560 25 ppm*1 | Scanning | 80 ppm*2*3 | Super G3 FAX | 1200 × 2400 dpi | 7 inches | •Mobile Supported |
| C2060 20 ppm*1 | 1 sided | 55 ppm*3 | | | | •Cloud Interactive |

^{*1:} A4 LEF. *2: For C3060/C2560 single pass DADF model (2 sided scanning). *3: A4 LEF 200 dpi to Folder. *4: Optional.

Various combinations



Standard Configuration Model-1T



With 1 Tray Module*



With 1 Tray Module



With 3 Tray Module*



With Side Tray* Supports distribution output for each of copy, print, and fax jobs

Uncompromising usability along with compatibility

Multipurpose device with small footprint and easy setup

- Compact design with width of 590 x depth of 659 mm
- Select a right configuration of 1, 2 or 4 trays as per your growing requirements

Compact design allows you to place it on your desktop







2 tray configuration with its optimal height and adjustable UI makes it easy to operate for all (including people with special needs).

Shared machines for offices.

Increase to maximum paper capacity of 2096 sheets*.


* 80 gsm Paper, Standard + 3 Tray Module (optional).



Quick scanning of high-volume originals*1

- Up to 80 ppm can be read at high speed in Scan*2
- Up to 130 sheets can be loaded
- One pass DADF will not damage the original document
- Instantly scan without manual entry of each original size
- Automatically converts custom size originals to standard size
- *1: C3060 / C2560 single pass DADF model.
- *2: 1 pass 2 sided scanning. Our Standard Paper (A4 LEF), 200 dpi, to Folder.



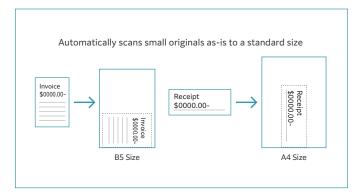

Exceptional colour accuracy and print quality

- High-resolution printing of 1200 x 2400 dpi achieved with LED printhead
- Smooth slating line and text reproduction with image enhancement processing
- Digital Correction Technology IReCT*, reduces colour-to-colour misregistration
- * Image Registration Control Technology.



Direct scan to or print from USB* for efficient operations

- You can directly print the documents stored on a USB flash drive or scanned data can be directly stored on a USB flash drive without using a PC
- * Optional.



Various finishing options are available according to your needs


Finisher-A2



Finisher-B4/B5 with Booklet Maker Unit



Supports single and double Staple-free Stapling *1



- *1: Staple-free stapling is available with Finisher-B5.
- 2: Optional.
- *3: Booklet Maker Unit is required. When specifying Saddle Staple or Single Fold with Finisher-B4/B5, paper is not folded but creased.
- *4: 80 gsm paper or less.

Quick and simple operability

Simple layout with easy navigation

Black and gray tone UI gives better contrast for easy recognition.

- Icons are evenly spread for easy recognition
- Consistent operation steps of each function for easy recall
- Home screen personalisation for ease of access to commonly used functions
- Pin regular settings for registering frequent or repeated jobs
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention



Smartphone becomes a "portable operation panel"

Seamless connectivity with mobile devices for Copy, Fax, Print, Scan*1 jobs using the Print Utility*2 application.

- Mobile device can be used as an alternative UI for operations control to minimise common touch points
- Frequent settings can be saved as "Favourites"
- Directly send fax or email with the addresses stored in the smartphone
- Minimise printer touch points for hygiene reasons
- Quickly establish direct Wi-Fi connection by scanning the QR code on the user panel

Note: Connect to machine via wireless environment or Wi-Fi direct connection.

- *1. F-mail Scan to Folder
- *2: It can be downloaded free of charge from Google Play™ or App Store.



Flexibility in office layout

Supports wireless LAN environment*1.

- Supports free addressing in the office with Wi-Fi support
- Up to five Wi-Fi Direct multifunction devices can be connected at the same time
- Supports direct mobile printing*2
- Print Utility, AirPrint, and Mopria® Print Service are supported
- *1: Optional.
- *2: When connecting to Wi-Fi Direct.

Print out from any multifunction device within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected multifunction devices.

- Improves productivity by printing from another available multifunction device when the current device is in use
- Up to 100 units can be linked
- Specific job settings can be revised at the device level to save time (1 sided to 2 sided, adding staple, all monochrome)
- * Optional.

Simple device management with Server-less Authentication

Server-less Authentication* enables user information to be synchronised among multifunction devices in the same group and allows administrators to reduce their workloads.

- Simply tap your card to link the user ID with the multifunction device
- The ID information is automatically shared with the other multifunction devices in the same network
- Authentication can be performed with any devices in the office
- * Optional

Simple scanning to yourself

With ScanAuto, you can easily send scanned data with a touch of a button.

- Automatically adjusts the orientation or 1-sided/2-sided of the original document
- Automatically sets user mail address as the destination by using user authentication function

Multiple destination scanning


Multiple destination scan enables concurrent multi destinations, scan to PC folders, e-mail, and URL.

 Business continuity planning can be established by saving a copy of each scan on PC or Server (URL)

Digitisation of paper documents for effortless document management

With Scan Delivery*, you can automatically process and store scanned images by simply pressing the preset button for each workflow or document type.

- Automate to set file format, file name, OCR*, etc.
- Automatically stores scanned and processed documents in the appropriate destination
- Specify particular words or characters in a document as the folder or file name
- $\, \bullet \,$ 0 and other frequently mis-recognised characters can be read correctly
- * Optional.





QR codes and bar codes application

Where QR code or bar code is available on the headsheet or content body of the original document for scanning, Scan Delivery will recognise and process the information accordingly.

Streamline operations for remote work style

Do not miss any faxes when you are working remotely


Paperless fax function automatically stores received faxes into folders which can be transferred to a PC or sent as emails.

- Received faxes can be forwarded to your mobile device by email
- Received faxes can be transferred to Working Folder*1
- It can be sorted by fax number, date received, and person in charge*2
- \bullet Incoming fax processing can be switched by time, day of the week and period^{*2}
- For example, you can switch from paper-based output to an electronic transfer in a single operation*²
- *1: Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.
- *2: Optional

Share information anytime, anywhere

With Working Folder* and internet access, documents can be viewed regardless of time and location.

- Can be linked smoothly with multifunction devices, DocuWorks, and mobile devices
- Documents in Working Folder can be printed from the control panel
- Scanned documents will be assigned a file name and stored in Working Folder. An email notification will be sent to relevant users

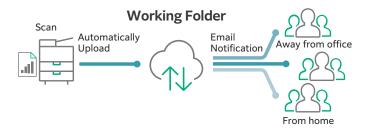


 \star Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Centralised cloud integration

Cloud Service Hub* allows single sign-on to multiple cloud storage services.

- Specific storage location can be assigned for scanned documents directly from the multifunction device
- Searching documents from multiple cloud services is supported
- Full-text search on scanned documents can be performed with OCR



* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Towards a sustainable society

FUJIFILM Group strive for developing a sustainable society by means of environment friendly products with less power consumption and CO_2 emissions.

Reducing energy consumption

- -Less energy & noise with high resolution printing on LED printhead
- -Low temperature fusing & high quality print with EA-Eco toner
- -Smart Energy Save distributes power only to the features requested by users

Smaller carbon footprint

- -Reduce CO_2 emissions by adoption of environmentally friendly inedible woody biomass plastic for selected parts
- -Deploy recycling system that collects and recycles used devices and consumables

Reducing wastage

- -Zero waste & contamination free setup with Staple-free Staple
- -Reduce unnecessary paper consumption by using functions like paperless fax, multi-up printing, scan workflow and authentication process to restrict wasteful printing

Inclusive society

- -Switch swiftly between multiple languages* on the UI panel for a diverse workforce in your office
- * Japanese, English, Chinese (Simplified/Traditional), Korean, Thai, Vietnamese, and Indonesian.

Safeguard important information

Information is an important asset which should be protected at all cost

Protect from unauthorised user

Multiple options of setting user authorisation allow administrator to select a right combination as per given environment.

- Local Authentication
- Authentication by Remote Server*
- IC Card Authentication*
- User-specific feature access
- Private Charge Print
- * Ontional

Additional layer of unwanted access can be created for specific users. (e.g. guests).

- Secondary Ethernet Kit*
- * Optional.

Protects Data

Protects against any malicious intent of hacking, tampering with device / system settings.

- Encryption of stored data
- Uses TPM* 2.0 chip for encryption key management
- Deletes settings and document information all at once
- * Trusted Platform Module

Protects the information by means of strong encryption while transferring it between devices, servers etc.

- Encryption of communication paths by SSL/TLS or IPsec
- Encryption when transferring via SMBv3 and SFTP
- Scan file encryption/signature
- Email encryption and signature by S/MIME
- TLS version limit
- Elliptic curve cryptography
- WPA3

Protect from unauthorised access

Protects device settings at multiple levels by clearly demarking change restrictions for different target audience - End users, IT administrators and Service Engineers.

- Service representative operation restriction
- Account lock to prevent unauthorised access
- Information for changing the default password
- Warnings displayed when using global IP address

Prevents unauthorised program from installing without notice. Robust IT audits are supported with device data logs for easy tracking.

- Software signature verification
- Remote update restrictions
- IP address filtering
- Tampering detection at startup and automatic restoration when tampering is detected
- Prevention of tampering during operation
- Audit log
- Audit log system transfer

Prevents operation errors

Prevents information leakage due to inadvertent mistakes by administrators and users.

- Scan documents to be delivered to fixed destination
- Re-enter fax recipient
- Annotations
- Hidden text printing*
- Digital code embedding and tracking function*
- * Optional



Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures, most problems can be resolved without waiting for the service representatives or sales representatives.

1. Resolve problem using the "Help" function on the device

- Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel





2. "Remote Assistance" with the help of operators

- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel

Keeping a close eye on your multifunction device on a daily basis

Monitoring the multifunction device status to minimise operation down time.

- Check billing meter
- Automatically delivers consumables when cartridges level is low
- Detect machine errors for early invention to rectify the problem Note: You need to apply for using the EP service. (free of charge).

Apeos C3060 / C2560 / C2060 Functions & Specifications

Basic Specifications / Copy Function

| Item | | ns / Copy Fun | C2560 | C2060 |
|--|------------------------|--|--|---|
| Туре | | Desktop / Console | C2300 | C2000 |
| Memory Cap | acity | 4 GB (Max: 4 GB) | | |
| | ce Capacity*1 | 128 GB | | |
| Colour Capal | | Full colour | | |
| | | | | |
| Scan Resolut | | 600 x 600 dpi | | |
| Printing Reso | Diution | 1200 x 2400 dpi | - / Ct Ci | 1 +2 |
| Warm-up Tir | me ^{*2} | temperature) | seconds or less (23 | degrees Celsius room |
| Recovery Tin (Recovery Tin Sleep Mode) | me from | 14 seconds or less (23 degrees Celsius | 12 seconds or less | 12 seconds or less |
| Original Size | | | | m for both Sheet and |
| | Max | A3, 11 x 17" | | |
| | Min | A5 [Postcard (100 x | 148 mm) when us | ing Rynass Trayl |
| Paper Size | Image loss | | | |
| | width | Lead edge 4.0 mm, | Trail edge 2.0 mm, F | Right/Left edge 2.0 mm |
| Paper | Paper Tray | 60 to 256 gsm | | |
| Weight*4 | Bypass Tray | 60 to 216 gsm | | |
| First Copy | B/W | 4.9 sec. (A4 LEF / Monochrome priority mode) | | rome priority mode) |
| Output Time | Colour | 6.7 sec. (A4 LEF / Colour priority mode) | 8.1 sec. (A4 LEF / Colour p | riority mode) |
| | A4 LEF / JIS B5 LEF | B/W: 30 ppm, Colour: 30 ppm | B/W: 25 ppm, Colour: 25 ppm | B/W: 20 ppm, Colour: 20 ppm |
| Continuous | A4 | B/W: 23 ppm, Colour: 23 ppm | B/W: 19 ppm, Colour: 19 ppm | B/W: 16 ppm, Colour: 16 ppm |
| Continuous Copy Speed*5 | JIS B5 | B/W: 17 ppm, Colour: 17 ppm | B/W: 14 ppm, Colour: 14 ppm | B/W: 11 ppm, Colour: 11 ppm |
| | JIS B4 | B/W: 20 ppm, Colour: 20 ppm | B/W: 16 ppm, Colour: 16 ppm | B/W: 13 ppm, Colour: 13 ppm |
| | A3 | B/W: 17 ppm, Colour: 17 ppm | B/W: 14 ppm, Colour: 14 ppm | B/W: 11 ppm, Colour: 11 ppm |
| | Standard | 500 sheets x 1-tray | | |
| Paper Tray Capacity*6 | Optional | 1 Tray Module / 1 Tray Module with Cabinet: 500 sheets x 1-tray 3 Tray Module: 500 sheets x 3-tray | | |
| | Max | 2096 sheets [Stand | ard + 3 Tray Module | 2] |
| Output Tray | Capacity*7 | | | wer Center: 250 sheets |
| Power Suppl | V | AC220-240 V +/- 1 | 0 %. 8 A. 50/60 Hz | common |
| Maximum Po Consumption | ower | 1.76 kW (AC220 V Sleep Mode: 0.4 W Ready Mode: 83 W | +/- 10 %), 1.92 kW (AC230 V +/- 10 % (AC230 V +/- 10 % | (AC240 V +/- 10 %) |
| | C2060 | installed.) W 590 x D 659 x H with Cabinet is insta W 590 x D 659 x H | 885 mm (when opti 1122 mm (when op illed.) | ional 1 Tray Module is itional 1 Tray Module itional 3 Tray Module is |
| Dimensions | C2560/C3060 | installed.) W 590 x D 659 x H with Cabinet is insta | 881 mm (when opti 1118 mm (when op illed.) | ional 1 Tray Module is itional 1 Tray Module itional 3 Tray Module is |
| Weight*8 | C2060 | 68 kg 79 kg (when option 91 kg (when option 94 kg (when option | al 1 Tray Module wit | th Cabinet is installed.) |
| | C2560/C3060 | 70 kg 81 kg (when option 93 kg (when option 96 kg (when option | al 1 Tray Module is i al 1 Tray Module wit al 3 Tray Module is i | nstalled.) th Cabinet is installed.) nstalled.) |
| | | حائماني بالمعمع عماما منا | | |

- *1: The Storage Device Capacity is not totally available for customers.

 *2: It may change depending on usage conditions.

 *3: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed.

 *4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.

 *5: The speed may be reduced due to the image quality adjustment.

 *6: 80 gsm paper.

 *7: 70 gsm paper.

 *8: Excluding Toner Cartridge.

Fax Function (Ontional)

| Tax Function (Optional) | |
|-------------------------|--|
| Item | Description |
| Original Size | Max: A3, 11 x 17", Long document (Longest 600 mm) |
| Recording Paper Siz | e Max: A3, 11 x 17"; Min: A5 |
| Transmission Time | 2 seconds and more but fewer than 3 seconds*1 |
| Transmission Mode | ITU-T G3 |
| Applicable Lines | Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports*2 (G3-3 ports) |

^{*1:} When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.
*2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Print Function

| Time Function | | | |
|-----------------------------------|---------------|--|--|
| Item | | Description | |
| Type | | Built-in type | |
| Continuous | Print Speed*1 | Same as the Basic Specifications / Copy Function | |
| Printing | Standard | [PCL Driver] Standard: 1200 x 2400 dpi, High Quality: 1200 x 2400 dpi, High Resolution*2: 1200 x 1200 dpi | |
| Resolution | Optional | [Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1200 x 2400 dpi, High Resolution*2: 1200 x 1200 dpi | |
| Page | Standard | PCL5 / PCL6 | |
| Description Language | Optional | Adobe® PostScript® 3™ | |
| Supported | Standard | [PCL Driver] Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) [Mac OS X Driver] | |
| Operating System* ³ | Optional | macOS 11 / 10.15 / 10.14 / 10.13 [Adobe® PostScript® 3™ Driver] Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) macOS 11 / 10.15 / 10.14 / 10.13 | |
| Interface | Standard | Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0 | |
| ппенасе | Optional | Wireless LAN (IEEE 802.11a / b / g / n / ac) | |

- *1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

 *2: High Resolution mode is recommended for printing fine lines or cadastral maps.

 *3: Please refer to our official website for the latest supported OS.

Scan Function

| ocarr r arrection | | |
|-------------------|----------|---|
| Item | | Description |
| Туре | | Colour Scanner |
| Scan Resolution | | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi |
| Scan Speed | | Same as the Scan Speed for the Duplex Automatic Document Feeder |
| Interface | Standard | Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T |
| | Optional | Wireless LAN (IEEE 802.11a / b / g / n / ac) |

Duplex Automatic Document Feeder

| Item | | | C2060 |
|------|---------------------------------|------------------------------|--|
| | Original Size / Paper Weight | | Max: A3, 11 x 17"; Min: A5 ⁺¹ 38 to 128 gsm (In Duplex: 50 to 128 gsm) |
| | Capacity*2 | | 110 sheets |
| | Scan | Copy (A4 LEF, Simplex) | B/W: 20 ppm, Colour: 20 ppm |
| | Speed*3 | Scan | B/W: 55 ppm, Colour: 55 ppm [Standard Document (A4 LEE), 200 dpi, to Folder] |

Note: Installed for model C2060 as standard.
*1: The minimum custom size is 125 x 85 mm.
*2: 70 gsm paper.

- *2: 70 gsm paper. *3: The scanning speed varies depending on the documents.

Duplex Automatic Document Feeder [1 pass, 2 sided scanning]

| | | <u> </u> | 01 | |
|---------------------------------|------------------------------|--|--------------------------------|--|
| Item | | C3060 | C2560 | |
| Original Size / Paper Weight | | Max: A3, 11 x 17"; Min: A6*1 38 to 128 gsm (In Duplex: 50 to 128 gsm)*2 | | |
| Capacity*3 | | 130 sheets | | |
| Scan | Copy (A4 LEF, Simplex) | B/W: 30 ppm, Colour: 30 ppm | B/W: 25 ppm, Colour: 25 ppm | |
| Speed*4 | Scan | B/W: 55 ppm, Colour: 55 ppm (1 pass, 2 sided scanning: B/W 80 ppm, Colour 80 ppm) [Standard Document (A4 LEF), 200 dpi, to Folder] | | |

- Note: Installed for model C2560/C3060 as standard.
 *1: The minimum custom size is 49 x 85 mm.
 *2: Custom sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm.
 *3: 70 gsm paper.
 *4: The scanning speed varies depending on the documents.

Side Tray (Optional)

| Item | Description |
|-----------------|--------------------------|
| Paper Capacity* | 100 sheets |
| Dimensions | W 347 x D 419 x H 201 mm |

^{*: 70} gsm paper.

Finisher-A2 (Optional)

| | / L= (0 pt. | oriar) | |
|------------|--------------|--|--|
| Item | | Description | |
| Туре | | Sort (Offset available) / Stack (Offset available) | |
| Paper Size | | Max: A3, 11 x 17"; Min: Postcard (100 x 148 mm) | |
| Paper Weig | ght | 60 to 256 gsm | |
| Paper Capa | acity*1 | [Without Stapling] A4: 500 sheets; JIS B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking*2: 250 sheets [With Stapling] 30 sets | |
| | Capacity | A4: 50 sheets (90 gsm or less), JIS B4 or larger: 30 sheets (90 gsm or less) | |
| Staple | Paper Size | Max: A3, 11 x 17"; Min: JIS B5 LEF | |
| | Paper Weight | t 60 to 256 gsm | |
| | Position | Single stapling, Dual stapling | |
| Dimensions | s*3 / Weight | W 658 x D 461 x H 238 mm, 11 kg | |

*1: 70 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets. *3: Width 478 mm when the paper support is stored.

¹⁾ If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.

2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

Finisher-B4 / B5 (Optional)

| Item | | Finisher-B4 | Finisher-B5 | |
|------------------|-----------------|--|--|--|
| Туре | | Sort (Offset available*1*2) / Stack (Offset available*1*2) | | |
| Paper Size*3 | | Max: A3, 11 x 17"; Min: A5 | | |
| Paper Weigh | ht | 60 to 256 gsm | | |
| Paper Capacity*4 | | [Without Stapling] A4: 2000 s sheets, Mixed Size Stacking*5: [With Stapling] A4: 100 sets of larger: 75 sets or 750 sheets [With Booklet Finishing*7] 50 s [With Fold*7] 500 sheets | 300 sheets or 1000 sheets*6, JIS B4 or | |
| | Capacity | 50 sheets (90 gsm or less) | Staple: 50 sheets (90 gsm or less), Staple-free Staple*8*9: 10 sheets (80 gsm or less) | |
| Charle | Paper Size*10 | Max: A3, 11 x 17"; Min: A5 LEF | | |
| Staple | | 60 to 256 gsm | Staple: 60 to 256 gsm, Staple-free Staple*8*9: 60 to 105 gsm | |
| | Position | Single stapling, Dual stapling | | |
| | Number of Holes | 2-hole / 4-hole punch or 2-hole | / 3-hole punch (US Specifications) | |
| Punch*11 | Paper Size*12 | Paper Size*12 Max:A3, 11×17"; Min: A5 LEF | | |
| | Paper Weight | 60 to 220 gsm | | |
| Booklet | Capacity | Saddle Staple: 15 sheets; Sing | gle Fold: 5 sheets | |
| Finishing*7 | Paper Size | Max: A3, 11 x 17"; Min: A4, Le | etter | |
| i iiiisiiiiig | Paper Weight | Saddle Staple: 60 to 80 gsm*13 | 3, Single Fold: 60 to 105 gsm | |
| Dimensions* | *14 | W 607 x D 653 x H 1041 mm With Booklet Maker Unit: W 6 | 07 x D 673 x H 1079 mm | |
| Weight | | 26 kg, Punch Kit: + 2 kg, Booklet Maker Unit: + 10 kg | 29 kg, Punch Kit: + 2 kg, Booklet Maker Unit: + 10 kg | |

Note: Finisher-B4 / Finisher-B5 is available only when optional 1 Tray Module with Cabinet or 3 Tray Module is attached to Main Unit.

Tray Module is attached to Main Unit. Note: Only stapled stapling is available with Finisher-B4. You cannot add staple-free stapling function. Note: Both stapled stapling and staple-free stapling are available with Finisher-B5.

*1: The offset feature is set to disabled by factory default. The setting can be changed as necessary.

*2: Outputs less than 210 mm width are delivered without offset stacking.

*3: Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.

- *3 : Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.
 *4 : 70 gsm paper.
 *5 : When larger size sheets are stacked on top of smaller size sheets.
 *6 : 75 sets or 750 sheets with dual stapling.
 *7 : The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B. Make a crease allows you to fold easily. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.
 *8 : Staple-free stapling is available with Finisher-B5.
 *9 : Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over.
 *10: Available staple positions vary depending on the paper size.
 *11: The Punch function requires the optional 2/4 Hole Punch Kit for Finisher-B or US 2/3 Hole Punch Kit for Finisher-B.
 *12: Available number of punch holes varies depending on the paper size.
 *13: Covers can be up to 220 gsm (Extra Heavyweight).
 *14: Inner connector within the body is excluded.

Ontional

| Optional | |
|---------------|--|
| Item Code | Description |
| A-AC20-30600A | 1 Tray Module |
| A-AC20-30600B | 1 Tray Module with Cabinet |
| A-AC20-30600C | 3 Tray Module |
| A-AC20-30600D | Full Stack Sensor Kit |
| A-AC20-30600E | Side Tray |
| A-AC20-30600F | Finisher-A2 |
| A-AC20-30600G | Finisher-B4 |
| A-AC20-30600H | Finisher-B5 |
| A-AC20-30600I | Booklet Maker For Fin-B4/B5 |
| A-AC20-30600J | 2/4 Hole Punch For Fin-B4/B5 |
| A-AC20-30600K | 2/3 Hole Punch For Fin-B4/B5 |
| A-AC20-30600L | Data Overwrite Kit |
| A-AC20-30600M | Secondary Ethernet Kit |
| A-AC20-30600N | Wireless Network Kit 2 |
| A-AC20-306000 | Postscript Kit |
| A-AC20-30600P | Multi-Language Font Kit |
| A-AC20-30600Q | TC/SC Additional Fonts Kit |
| A-AC20-3060OR | Fax Upgrade |
| A-AC20-3060OS | 2nd Fax Line (Fax is Required) |
| A-AC20-3060OT | 3rd Fax Line (Fax is Required) |
| A-AC20-30600U | IP Fax(SIP) Kit |
| A-AC20-30600V | Searchable PDF Kit |
| A-AC20-30600W | USB Memory Kit |
| A-AC20-30600X | External Access kit |
| A-AC20-30600Y | Copy Management Expansion Kit |
| A-AC20-30600Z | Remote Authentication Kit |
| A-AC20-3060AA | Image Log Kit |
| A-AC20-3060AB | Image Log Kit (Adobe PostScript) |
| A-AC20-3060AC | Paperless Fax Delivery Kit |
| A-AC20-3060AD | Scan Delivery Kit |
| A-AC20-3060AE | Serverless On-Demand Print Kit |
| A-AC20-3060AF | Embedded IC Card Reader B |
| A-AC20-3060AG | Embedded IC Card Reader B for Wing Table |
| A-AC20-3060AH | External IC Card Reader B |
| A-AC20-3060AI | USB Hub |
| | |

Consumables/Supplies

| Item Code | Description | Yield (Sheets) | |
|-----------|--------------------------|----------------|--|
| CT202496 | Toner Cartridge Black | 22,000 | |
| CT202497 | Toner Cartridge Cyan | 15,000 | |
| CT202498 | Toner Cartridge Magenta | 15,000 | |
| CT202499 | Toner Cartridge Yellow | 15,000 | |
| CT351356 | Drum Cartridge (Black) | 73,400 | |
| CT351356 | Drum Cartridge (Cyan) | 73,400 | |
| CT351356 | Drum Cartridge (Magenta) | 73,400 | |
| CT351356 | Drum Cartridge (Yellow) | 73,400 | |
| CWAA1043 | Waste Toner Bottle | 33,000 | |

Enhanced basic functions

Copy

- Output Color
- Paper SupplyReduce/Enlarge
- Slight Reduction
 Auto 2 Sided Output
- Pages per Side
 (2 Pages / 4 Pages / 8 Pages)
- Copy Output (uncollated/collated)
 Single Color / Dual Color Copy
- Copy (ID Card)
 Mixed Size Originals
- Original Size
 Image Enhancement
- Book Copying / 2 Sided Book Copying
- Edge Erase
- Image Shift
 Mirror Image / Negative Image
- Image Rotation
 Booklet Creation
- Multiple-Up x Booklet Creation
 Book Copying
- Covers
- Poster
- Repeat Image
 Preset Repeat Image
- Annotations

- Watermark(optional)Delete Outside / Delete Inside
- loint lob
- Sample Job
- Staple / Hole Punch / Crease (optional)

Print

- PCI
- PostScript (optional)
 Multi-Model Print Driver 2
 Microsoft Universal Print
 Secure Print

- Sample Set
 Delayed Print
- Print from Folder
- Form RegistrationMultiple-UpBooklet Creation
- Multiple-Up x Booklet Creation Poster
- Covers / Separators
- Envelope printingPrivate Charge Print
- Charge Print
- Print from USB (optional)Staple / Punch / Crease (optional)
- · Server-less On-Demand Print (optional)

Fax (Optional)

- G3 × maximum 3 ports (optional)
- Internet Fax SIP Fax (optional)
- Send Direct Fax
- Address Book (maximum 5000 entries)
- Broadcast Transmission / Group Transmission
 Redial / Resend Unsent Documents
- Rotate 90 Degrees
- Preview
- 2 Sided Scanning
- Resolution
 Lighten / Darken
 Original Type
- Mixed Size OriginalsTransmission Header
- Priority Send / Delay StartCover Page
- Remote Folder
 Transmission Report
- Activity ReportRe-enter Recipient
- Prevents Unsolicited FaxesProhibit Direct Fax
- Receive Paperless FaxSimple Image Log Support
- · Paperless Fax Delivery (optional)

Scan (Optional)

- Scan to Folder
- (TWAIN driver/Web browser)
 Transfer via SMB/FTP/SFTP
- Email
- Scan (URL)
- Scan to USB (optional)
 Simultaneous transmission such
- as Email / Transfer via SMB, etc.
- ScanAuto

- ScanAuto
 Preview
 Color Scanning
 Sided Scanning
 Mixed Size Originals
 File Format: TIFF / JPEG / PDF*1 / XDW (DocuWorks)*2
 Single Elie for Each Dark

 Street Elie for Each Elie
- Single File for Each Page
 Searchable Text (optional)
- High Compression (High Speed) (optional)

- Job Flow Sheets
 Scan Delivery (optional)
 High Compression / Specific Color / Searchable Text / Security / Signature / Optimise For Quick Web View
- *2: Searchable Text / Security / Signature

Others

- Local Authentication
- Remote Authentication (optional)
 Azure AD linked authentication (optional)
- IC Card Log In (optional)
 Serverless Authentication (optional)

- Secondary Ethernet (optional)Wi-Fi Support (optional)

- Data Encryption
 Data Overwrite (optional)
- Image Log (optional)
 Message screen from an administrator
- Job History Export

fujifilm.com/fbhk

FUJ!FILM

11/F, 12 Taikoo Wan Road, Taikoo Shing, Hong Kong Tel. +852 2513 2888 Fax. +852 2560 6433

Customer Support Center

Email:

Hong Kong Fax. +852 2513 2518 Tel. +852 2513 2513 Macau Tel. +853 2855 8008 Fax. +853 2857 4996 shm-fbhk-csc@fujifilm.com

FUJIFILM Business Innovation Hong Kong Limited

FUJIFILM BI Hong Kong (f) (in) (D) (%)









Note: More options may need to be added depending on the model

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements. Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: *Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates: *Unused postage stamps, post cards, etc. *Certificate stamps stipulated by law. *Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

personal use, family use or other similar uses within a limited circle.

Trademarks -FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. Apeos, DocuMorks, Working Folder, Cloud Service Hub, Cloud On-Demand Print are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. *Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. *Apple, Mac, macOS, OS X and Alfreyint are trademarks of Apple Inc. registered in the U.S. and other countries. *Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks of Apple as evice marks of Mopria Alliance, Inc. in the United States and other countries. *All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or